


Specifications >>

Model 210-3 SRA

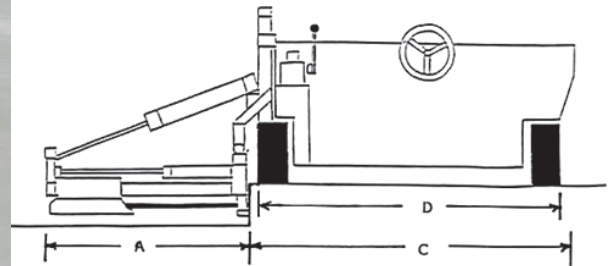

	Horizontal Position >>	Vertical Position >>
Lower Length (A)	47" (119.4 cm)	N/A
Overall Length (A) + (C)	117" (297.2 cm)	91" (231.1 cm)
Cart Length (C)		70" (177.8 cm)
Wheel Base (D)		58" (147.3 cm)
Width		60" (152.4 cm)
Height (E)	44" (111.8 cm)	Varies
Weight		2,000 lbs (908.0 kg)
Drill distance from corner	6" (15.2 cm)	N/A
Drill distance from ground	3" (7.6 cm)	up to 12" (30.5 cm)
Drill depth (std.)		18" (45.7 cm)
Drill bit diameter		5/8" to 2 1/2" (15.9 mm to 63.5 mm)
Distance from wheel to center of bit (F)	N/A	23 1/2" (59.7 cm)
Drill motor (pneumatic)		CP 32A
Weight		54 lbs (24.5 kg)
Chuck size (std.)		7/8" x 3 1/4" (22.2 mm x 82.6 mm)
Air consumption (minimum)		300 cfm (8.4 m3/min)
Operating pressure		90 psi (6.2 bar)
Impact (ft. lbs./blow)		36 fpb (49.0 J)
Blows/minute		2200 bpm
Rotations/minute		288 rpm

*Specifications subject to change without notice.