

TRAILER-MOUNTED BOOMS



3522 A - 3632 T
4527 A - 5533 A




Access on the move

- Hydraulic outriggers and automatic leveling allow operation in under 30 seconds
- Superior combination of industry leading capacity and outreach
- Can be towed by a standard half-ton pickup truck - No commercial driver's license needed


Exceptional productivity

- Air / water lines and 110V GFI protected power to the platform

3632T

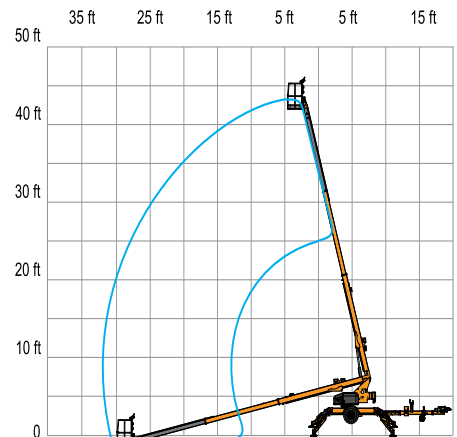

3522A 4527A 5533A

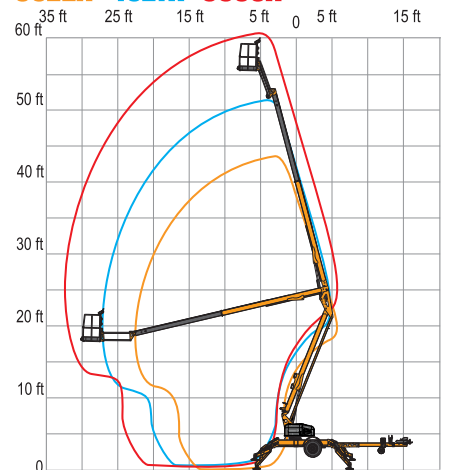

Haulotte 
GROUP

More than lifting

www.haulotte-usa.com




3522 A - 3632 T - 4527 A - 5533 A

TRAILER-MOUNTED BOOMS

TECHNICAL DATA

	3522 A	3632 T	4527 A	5533 A
Working height	41 ft 9 in	43 ft 6 in	51 ft	61 ft 3 in
Platform height	35 ft 9 in	37 ft 6 in	45 ft	55 ft 3 in
Horizontal outreach (from centerline)	22 ft 6 in	32 ft	27 ft	33 ft 5 in
Horizontal outreach (from edge of footpad)	17 ft 5 in	27 ft	21 ft	27 ft 4 in
Up and over height	19 ft	N/A	20 ft 9 in	23 ft 1 in
Lift capacity	500 lbs			
A - Length - stowed	16 ft 3 in	21 ft 11 in	19 ft 6 in	22 ft 11 in
B - Width stowed	5 ft 6 in		5 ft 7 in	
C - Height stowed	6 ft 5 in		6 ft 6 in	
D x E - Platform size	4 ft x 2 ft 6 in			
F x G - Outrigger footprint	11 ft 1 in x 9 ft 11 in	12 ft 4 in x 11 ft 4 in	12 ft 11 in x 12 ft 9 in	
Turntable rotation	355° non-continuous			
Jib - length	4 ft 3 in	N/A	4 ft 3 in	
Jib - Vertical Motion	150° (+70 / -80)	N/A	150° (+70 / -80)	
Tow speed rating	65 mph			
Gradeability	12.5 %			
Leveling capability	12.5 °			
Tire size	ST 225/75 D15		ST 225/75 R15	
Power source	4 x 6 V 245 amp-hr			
Tongue weight (no options)	245 lbs	200 lbs	290 lbs	335 lbs
Weight (no options)	3400 lbs	4440 lbs	4200 lbs	4800 lbs

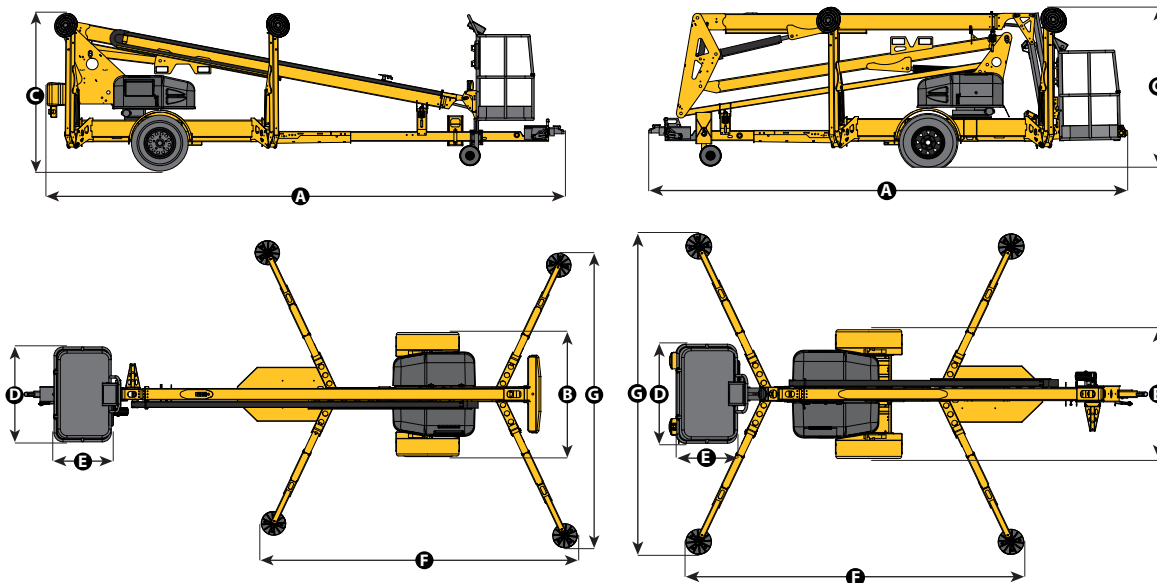

STANDARD EQUIPMENT

- Hydraulic outriggers
- Tilt alarm/sensor
- Hour meter and battery condition indicator
- Automatic leveling system and self-leveling platform
- 110V GFI protected outlet to platform and base
- Easy to use controls
- Air and water line to platform
- Inboard 40 amp charger
- Integrated forklift pockets
- Hydraulic surge brakes

OPTIONS & ACCESSORIES

- Material lifting hook
- Spare tire and mounting kit
- DC / Gas hybrid
- Platform rotator (manual)
- Flashing beacon
- Flourescent tube caddy
- Combination hitch
- Tool tray